

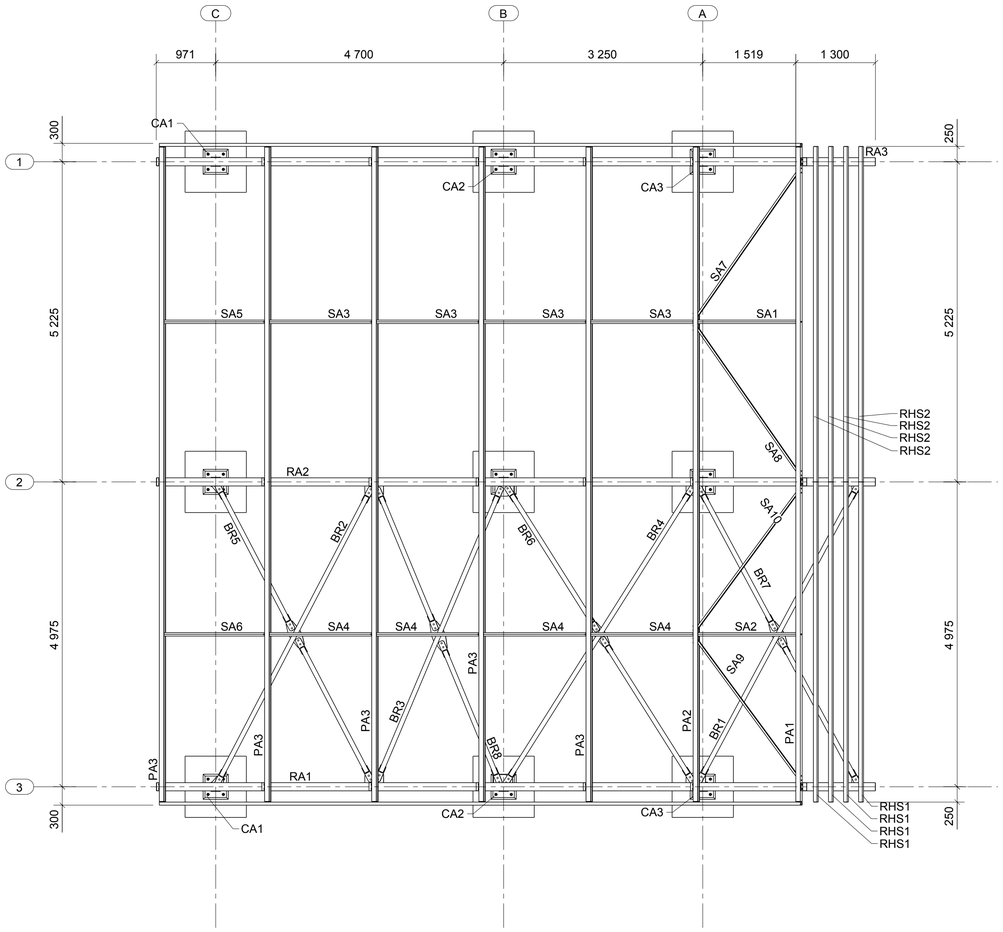


3D View

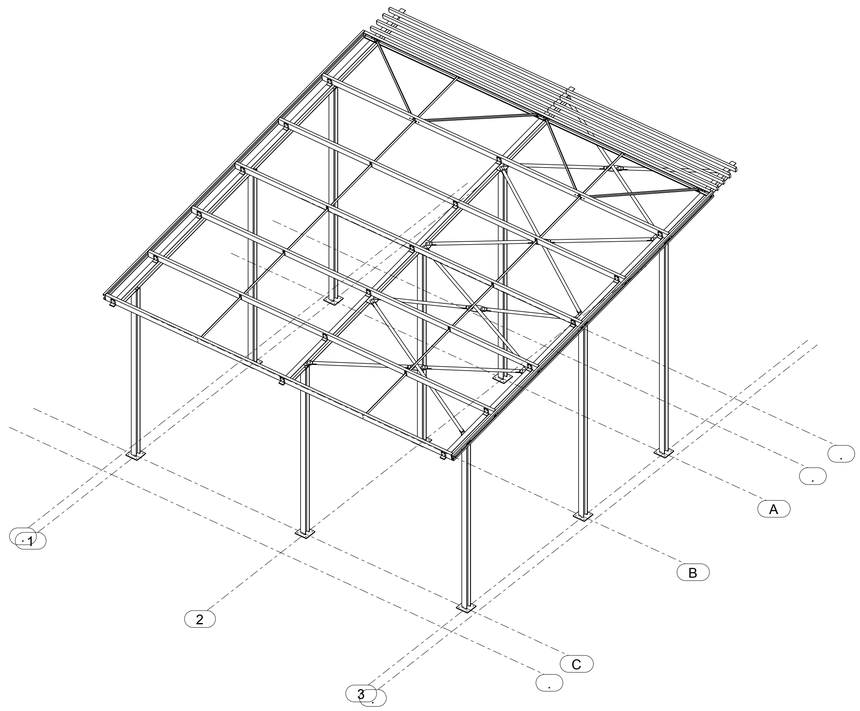

3D View

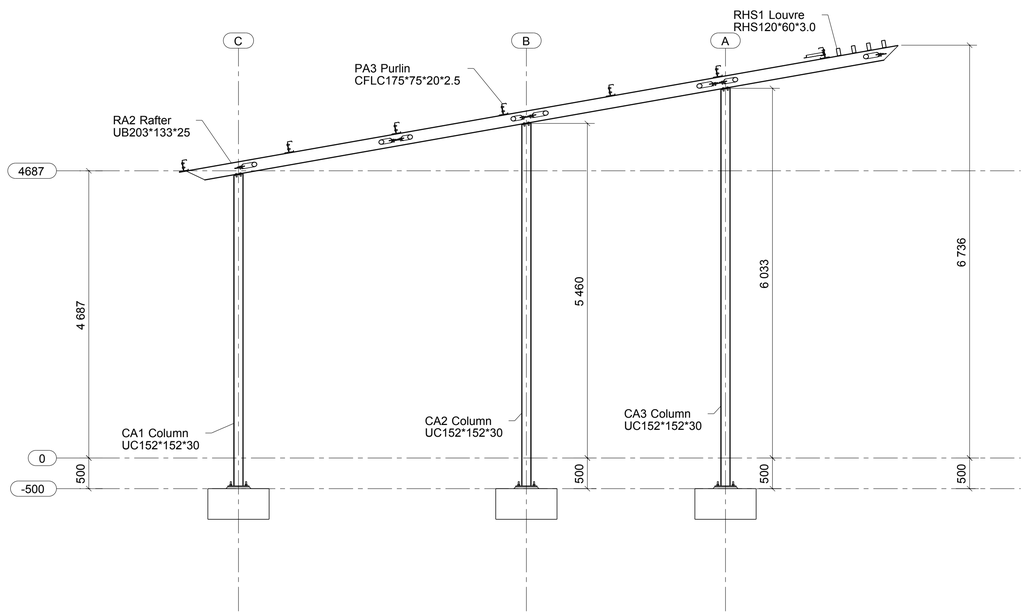

Grid 2

PART CHECK LIST

Assembly Name	Mark	Main part profile			Qty.
Bracing	BR1	CHS76.2*3.5			1
Bracing	BR2	CHS76.2*3.5			1
Bracing	BR3	CHS76.2*3.5			1
Bracing	BR4	CHS76.2*3.5			1
Bracing	BR5	CHS76.2*3.5			1
Bracing	BR6	CHS76.2*3.5			1
Bracing	BR7	CHS76.2*3.5			1
Bracing	BR8	CHS76.2*3.5			2
Bracing	BR9	CHS76.2*3.5			1
Bracing	BR10	CHS76.2*3.5			1
Bracing	BR11	CHS76.2*3.5			1
Column	CA1	UC152*152*30			3
Column	CA2	UC152*152*30			3
Column	CA3	UC152*152*30			3
False Rafter	FR1	L50*50*5			2
Purlin	PA1	CFLC175*75*20*2.5			1
Purlin	PA2	CFLC175*75*20*2.5			1
Purlin	PA3	CFLC175*75*20*2.5			5
Rafter	RA1	UB203*133*25			1
Rafter	RA2	UB203*133*25			1
Rafter	RA3	UB203*133*25			1
Louvre	RHS1	RHS120*60*3.0			4
Louvre	RHS2	RHS120*60*3.0			4
SagAngle	SA1	L40*40*5			1
SagAngle	SA2	L40*40*5			1
SagAngle	SA3	L40*40*5			4
SagAngle	SA4	L40*40*5			4
SagAngle	SA5	L40*40*5			1
SagAngle	SA6	L40*40*5			1
SagAngle	SA7	L40*40*5			1
SagAngle	SA8	L40*40*5			1
SagAngle	SA9	L40*40*5			1
SagAngle	SA10	L40*40*5			1

All Quantities Must Be Checked Prior To Loading

Column Lengths to be determined on site

Rev	Mark	Revision Description	Date
1	HL	Drawings revised as per engineers drawings	27.07.2015

STRUCTURAL DETAILING
Cel : 082 806 7600
Fax: 086 579 3950
hldetailing@gmail.com

WILLBERG STEEL
HURLINGHAM ENTRANCE COVER
ENTRANCE CANOPY

A1 General Arrangement Drawing

Checked by: JHL
Approved by:
Drawn JHL
Scale 1:75 1:50
Issued 28.07.2015
Revised 27.07.2015
Project Number 150736
Drawing G [1] A1 Rev 1

V:\BIZ Hurlingham Canopy Rev 1